



CERTIFICATE OF SAFETY

A sample of the following Enhanced Vision Corporation product has been examined and found to comply with applicable international safety requirements for:

INFORMATION TECHNOLOGY EQUIPMENT

The following standards were used in the determination of the safety construction:
IEC 62368-1:2014 (Second Edition)

Name of Unit: Smart Reader HD – Scan and Read Device **Model No.:** Q0521050 and Q0521051

Electrical Ratings: 19Vdc

Evaluated By: *CM Bayhi*

Charles M. Bayhi, P.E. July 27, 2018
CPSM Corporation





Test Report issued under the responsibility of:



TEST REPORT
IEC 62368-1
Audio/video, information and communication technology equipment
Part 1: Safety requirements

Report Number : 20180727

Date of issue: July 27, 2018

Total number of pages :

Applicant's name : Enhanced Vision Corporation.

Address : 5882 Machine Drive, Huntington Beach, CA 92649 USA

Test specification:

Standard: IEC 62368-1:2014 (Second Edition)

Test procedure.....: CB Scheme

Non-standard test method.....: N/A

Test Report Form No.: IEC62368_1B

Test Report Form(s) Originator : UL(US)

Master TRF : 2014-03

Copyright © 2014 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test Item description	Smart Reader HD – Scan and Read Device	
Trade Mark		
Manufacturer	Enhanced Vision Corporation 5882 Machine Drive, Huntington Beach, CA 92649 USA	
Model/Type reference	Q0521050 and Q0521051	
Ratings	Optional, 19 V dc	
Testing procedure and testing location:		
Testing Laboratory:	CPSM Corporation	
Testing location/ address	26982 Venado Dr., Mission Viejo, CA 92691	
Associated CB Testing Laboratory:		
Testing location/ address.....		
Tested by (name + signature).....	Charles Bayhi	
Approved by (name + signature)	Charles Bayhi	
Testing procedure: TMP/CTF Stage 1		
Testing location/ address.....		
Tested by (name + signature).....		
Approved by (name + signature)		
Testing procedure: WMT/CTF Stage 2		
Testing location/ address.....		
Tested by (name + signature).....		
Witnessed by (name + signature)		
Approved by (name + signature)		
Testing procedure: SMT/CTF Stage 3 or 4		

Testing location/ address.....:		
Tested by (name + signature)..... :		
Approved by (name + signature) :		
Supervised by (name + signature) :		

List of Attachments (including a total number of pages in each attachment):	
Summary of testing: Unless otherwise indicated, all tests were conducted at CPSM Corporation	
Tests performed (name of test and test clause): None	Testing location: CPSM Corporation 26982 Venado Mission Viejo, CA 92691 USA
Tests performed were Clause 4.8.4 No additional Laboratory testing was considered necessary due to engineering judgment. The product is a Class III (supplied by SELV) and LPS. Battery has been tested previous CB Report.	
Summary of compliance with National Differences: List of countries addressed Denmark, Group(including Denmark, Finland, Ireland, Italy, Sweden, Norway and United Kingdom), Canada, and United States. The product fulfils the requirements of EN62368-1:2014.	



tification marks on a product must be authorized by



International

Domestic

TEST ITEM PARTICULARS:	
Classification of use by:	Ordinary person
Supply Connection :	External Circuit - not Mains connected - ES1
Supply % Tolerance :	None
Supply Connection – Type :	mating connector other: 4 pin circular connector
Considered current rating of protective device as part of building or equipment installation :	n/a
Equipment mobility :	Moveable
Over voltage category (OVC) :	OVC I
Class of equipment :	Class III
Access location :	N/A
Pollution degree (PD) :	PD 2
Manufacturer's specified maximum operating ambient :	40°C
IP protection class :	IPX0
Power Systems :	DC
Altitude during operation (m) :	2000 m or less
Altitude of test laboratory (m) :	2000 m or less
Mass of equipment (kg) :	1.8kg

POSSIBLE TEST CASE VERDICTS:	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
TESTING:	
Date of receipt of test item.....:	2018-07-24
Date (s) of performance of tests	2018-07-27
GENERAL REMARKS:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a comma / point is used as the decimal separator.</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC62	
:	Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	Enhanced Vision Corporation. 5882 Machine Drive, Huntington Beach, CA 92649 USA
GENERAL PRODUCT INFORMATION:	
<p>Product Description – Smart Reader HD is a lightweight, portable Full Page OCR (Optical Character Recognition) system that is ideal for reading magazines, books, newspapers, recipes and any other printed material. Position a document underneath the camera and press the OCR button and the Smart Reader HD will begin to read the text back aloud. The Smart Reader HD can connect to any HDMI monitor or TV for viewing an enlarged image.</p>	
Model Differences – None	

Additional application considerations – (Considerations used to test a component or sub-assembly) –

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:	
(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.) (Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.)	
Electrically-caused injury (Clause 5): (Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification) Example: +5 V dc input ES1	
Source of electrical energy	Corresponding classification (ES)
USB Port	ES1
HDMI	ES1
Audio	ES1
Electrically-caused fire (Clause 6): (Note: List sub-assembly or circuit designation and corresponding energy source classification) Example: Battery pack (maximum 85 watts): PS2	
Source of power or PIS	Corresponding classification (PS)
USB Port	PS1
HDMI	PS1
Audio	PS1
Injury caused by hazardous substances (Clause 7) (Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.) Example: Liquid in filled component Glycol	
Source of hazardous substances	Corresponding chemical
N/A	
Mechanically-caused injury (Clause 8) (Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.) Example: Wall mount unit MS2	
Source of kinetic/mechanical energy	Corresponding classification (MS)
N/A	
Thermal burn injury (Clause 9) (Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.) Example: Hand-held scanner – thermoplastic enclosure TS1	
Source of thermal energy	Corresponding classification (TS)
Enclosure	TS1

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:	
Radiation (Clause 10) (Note: List the types of radiation present in the product and the corresponding energy source classification.) Example: DVD – Class 1 Laser Product RS1	
Type of radiation	Corresponding classification (RS)
INDICATOR LEDS	RS1

ENERGY SOURCE DIAGRAM				
Indicate which energy sources are included in the energy source diagram. Insert diagram below				
ES	PS	MS	TS	RS

See Energy Source Diagrams in Diagrams attachments to this report.

OVERVIEW OF EMPLOYED SAFEGUARDS				
Clause	Possible Hazard			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
N/A	N/A			
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A			
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	Battery –	-	-	Battery Protection IC
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
N/A	N/A			
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
N/A				

10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	RS1 (Indicator LEDs)	Unit Enclosure	-	-
Supplementary Information: (1) See attached energy source diagram for additional details. (2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		Pass
4.1.1	Acceptance of materials, components and subassemblies		Pass
4.1.2	Use of components		Pass
4.1.3	Equipment design and construction		Pass
4.1.15	Markings and instructions.....:	(See Annex F)	Pass
4.4.4	Safeguard robustness		Pass
4.4.4.2	Steady force tests	External enclosure is robust and is minimum 1.0mm thick metal.	N/A
4.4.4.3	Drop tests	(See Annex T.7)	N/A
4.4.4.4	Impact tests.....:	External enclosure is robust and is minimum 1.0mm thick metal.	Pass
4.4.4.5	Internal accessible safeguard enclosure and barrier tests.....:	(See Annex T.3)	N/A
4.4.4.6	Glass Impact tests.....:	(See Annex T.9, Annex U)	N/A
4.4.4.74	Thermoplastic material tests	(See Annex T.8)	N/A
4.4.4.8	Air comprising a safeguard.....:	(See Annex T)	N/A
4.4.4.9	Accessibility and safeguard effectiveness		Pass
4.5	Explosion	No explosion occurred.	Pass
4.6	Fixing of conductors	No conductors are accessible to the operator.	N/A
4.6.1	Fix conductors not to defeat a safeguard		N/A
4.6.2	10 N force test applied to		N/A
4.7	Equipment for direct insertion into mains socket - outlets		N/A
4.7.2	Mains plug part complies with the relevant standard		N/A
4.7.3	Torque (Nm).....:		N/A
4.8	Products containing coin/button cell batteries	Complies	N/A
4.8.2	Instructional safeguard		N/A
4.8.3	Battery Compartment Construction	Complies – 2 screws	Pass
	Means to reduce the possibility of children removing the battery		
4.8.4	Battery Compartment Mechanical Tests	Complies	Pass
4.8.5	Battery Accessibility		N/A
4.9	Likelihood of fire or shock due to entry of conductive object	(See Annex P)	Pass

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5	ELECTRICALLY-CAUSED INJURY		Pass
5.2.1	Electrical energy source classifications :	(See appended table 5.2)	Pass
5.2.2	ES1, ES2 and ES3 limits	ES1	Pass
5.2.2.2	Steady-state voltage and current :	See appended table 5.2)	Pass
5.2.2.3	Capacitance limits :	(See appended table 5.2)	N/A
5.2.2.4	Single pulse limits :	(See appended table 5.2)	N/A
5.2.2.5	Limits for repetitive pulses..... :	(See appended table 5.2)	N/A
5.2.2.6	Ringing signals :	Covered as an element of the certified modem. (See Annex H)	N/A
5.2.2.7	Audio signals :	(See Clause E.1)	N/A
5.3	Protection against electrical energy sources		Pass
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		Pass
5.3.2.1	Accessibility to electrical energy sources and safeguards	Only ES1 circuits are accessible.	Pass
5.3.2.2	Contact requirements		Pass
	a) Test with test probe from Annex V :		Pass
	b) Electric strength test potential (V) :		Pass
	c) Air gap (mm) :		Pass
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		Pass
5.4.1.2	Properties of insulating material	Covered as an element of the power supply certification.	N/A
5.4.1.3	Humidity conditioning :	Covered as an element of the power supply certification.(See sub- clause 5.4.8)	N/A
5.4.1.4	Maximum operating temperature for insulating materials :	(See appended table 5.4.1.4)	Pass
5.4.1.5	Pollution degree :	PD2	
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling		N/A
5.4.1.6	Insulation in transformers with varying dimensions	Covered as an element of the power supply certification.	N/A
5.4.1.7	Insulation in circuits generating starting pulses		
5.4.1.8	Determination of working voltage	Covered as an element of the power supply certification.	N/A
5.4.1.9	Insulating surfaces	Covered as an element of the power supply certification.	N/A
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted	Covered as an element of the power supply certification.	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.1.10.2	Vicat softening temperature	(See appended table 5.4.1.10.2)	N/A
5.4.1.10.3	Ball pressure	(See appended table 5.4.1.10.3)	N/A
5.4.2	Clearances	Covered as an element of the power supply certification. Additionally evaluated in unit for clearances of primary to chassis.	N/A
5.4.2.2	Determining clearance using peak working voltage	(See appended table 5.4.2.2)	N/A
5.4.2.3	Determining clearance using required withstand voltage	(See appended table 5.4.2.3)	N/A
	a) a.c.		
	b) d.c.		
	c) ext		
	d) transient voltage determined by measurement		
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	(See appended table 5.4.2.4)	N/A
5.4.2.5	Multiplication factors for clearances and test voltages		N/A
5.4.3	Creepage distances	Covered as an element of the power supply certification.	N/A
5.4.3.1	General		N/A
5.4.3.3	Material Group		
5.4.4	Solid insulation	Covered as an element of the power supply certification.	N/A
5.4.4.2	Minimum distance through insulation	(See appended table 5.4.4.2)	N/A
5.4.4.3	Insulation compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Cemented joints		N/A
5.4.4.6	Thin sheet material		N/A
5.4.4.6.1	General requirements		N/A
5.4.4.6.2	Separable thin sheet material		N/A
	Number of layers (pcs)		N/A
5.4.4.6.3	Non-separable thin sheet material		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material	(See appended Table 5.4.9)	N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		N/A
5.4.4.9	Solid insulation at frequencies >30 kHz.....	(See appended Table 5.4.4.9)	N/A
5.4.5	Antenna terminal insulation		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
	Insulation resistance ($M\Lambda$)..... :		
5.4.6	Insulation of internal wire as part of supplementary safeguard	(See appended table 5.4.4.2)	N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning	Covered as an element of the power supply certification.	N/A
	Relative humidity (%)..... :		
	Temperature ($^{\circ}C$)..... :		
	Duration (h)..... :		
5.4.9	Electric strength test..... :	(See appended table 5.4.9)	Pass
5.4.9.1	Test procedure for a solid insulation type test		Pass
5.4.9.2	Test procedure for routine tests		Pass
5.4.10	Protection against transient voltages between external circuit		N/A
5.4.10.1	Parts and circuits separated from external circuits	see appended table 5.4.9.	N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test..... :		N/A
5.4.10.2.3	Steady-state test..... :		N/A
5.4.11	Insulation between external circuits and earthed circuitry		N/A
5.4.11.1	Exceptions to separation between external circuits and earth	.	N/A
5.4.11.2	Requirements		Pass
	Rated operating voltage U_{op} (V)..... :		
	Nominal voltage U_{peak} (V)..... :		
	Max increase due to variation U_{sp} :		
	Max increase due to ageing $\otimes U_{sa}$:		
	$U_{op} = U_{peak} + \otimes U_{sp} + \otimes U_{sa}$:		
5.5	Components as safeguards		
5.5.1	General	Covered as an element of the power supply certification.	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.2	Capacitors and RC units	Covered as an element of the power supply certification.	N/A
5.5.2.1	General requirement	Covered as an element of the power supply certification.	N/A
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector	(See appended table 5.5.2.2)	N/A
5.5.3	Transformers	Covered as an element of the power supply certification	N/A
5.5.4	Optocouplers	Covered as an element of the power supply certification	N/A
5.5.5	Relays	No mains relays.(See Annex G.2)	N/A
5.5.6	Resistors	Covered as an element of the power supply certification	N/A
5.5.7	SPD's	Covered as an element of the power supply certification	N/A
5.5.7.1	Use of an SPD connected to reliable earthing		N/A
5.5.7.2	Use of an SPD between mains and protective earth		N/A
5.5.8	Insulation between the mains and external circuit consisting of a coaxial cable	(See Annex G.10.3)	N/A
5.6	Protective conductor		Pass
5.6.2	Requirement for protective conductors		Pass
5.6.2.1	General requirements		Pass
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		Pass
	Protective earthing conductor size (mm ²)		
5.6.4	Requirement for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm ²).		
	Protective current rating (A)		
5.6.4.3	Current limiting and overcurrent protective devices		N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Requirement		N/A
	Conductor size (mm ²), nominal thread diameter (mm).		N/A
5.6.5.2	Corrosion		Pass
5.6.6	Resistance of the protective system		Pass
5.6.6.1	Requirements		Pass

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.6.2	Test Method Resistance (^)	(See appended table 5.6.6.2)	N/A
5.6.7	Reliable earthing		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		N/A
5.7.2	Measuring devices and networks		N/A
5.7.2.1	Measurement of touch current	(See appended table 5.7.4)	N/A
5.7.2.2	Measurement of prospective touch voltage		N/A
5.7.3	Equipment set-up, supply connections and earth connections		N/A
	System of interconnected equipment (separate connections/single connection)	N/A	
	Multiple connections to mains (one connection at a time/simultaneous connections)		
5.7.4	Earthed conductive accessible parts	(See appended Table 5.7.4)	N/A
5.7.5	Protective conductor current		N/A
	Supply Voltage (V)		
	Measured current (mA)		
	Instructional Safeguard		N/A
5.7.6	Prospective touch voltage and touch current due to external circuits		N/A
5.7.6.1	Touch current from coaxial cables		N/A
5.7.6.2	Prospective touch voltage and touch current from external circuits		N/A
5.7.7	Summation of touch currents from external circuits		N/A
	a) Equipment with earthed external circuits Measured current (mA)		N/A
	b) Equipment whose external circuits are not referenced to earth. Measured current (mA)		N/A

6	ELECTRICALLY- CAUSED FIRE		Pass
6.2	Classification of power sources (PS) and potential ignition sources (PIS)		Pass
6.2.2	Power source circuit classifications	(See appended table 6.2.2)	Pass
6.2.2.1	General	(See appended table 6.2.2)	Pass
6.2.2.2	Power measurement for worst-case load fault :	(See appended table 6.2.2)	Pass
6.2.2.3	Power measurement for worst-case power source fault..... :	(See appended table 6.2.2)	Pass
6.2.2.4	PS1	(See appended table 6.2.2)	Pass
6.2.2.5	PS2		N/A
6.2.2.6	PS3	(See appended table 6.2.3.1)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.2.3	Classification of potential ignition sources	(See appended table 6.2.3.2)	Pass
6.2.3.1	Arcing PIS	(See appended table 6.2.3.1)	Pass
6.2.3.2	Resistive PIS	(See appended table 6.2.3.2)	Pass
6.3	Safeguards against fire under normal operating and abnormal operating conditions		N/A
6.3.1 (a)	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials	(See appended table 5.4.1.5, 6.3.2, 9.0, B.2.6)	N/A
6.3.1 (b)	Combustible materials outside fire enclosure		N/A
6.4	Safeguards against fire under single fault conditions		N/A
6.4.1	Safeguard Method	Class III	Pass
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits	USB port, HDMI, Audio	Pass
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		Pass
6.4.3.1	General		Pass
6.4.3.2	Supplementary Safeguards	.	N/A
	Special conditions if conductors on printed boards are opened or peeled		N/A
6.4.3.3	Single Fault Conditions	(See appended table 6.4.3)	Pass
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		Pass
6.4.5	Control of fire spread in PS2 circuits		Pass
6.4.5.2	Supplementary safeguards	(See appended tables 4.1.2 and Annex G)	Pass
6.4.6	Control of fire spread in PS3 circuit		Pass
6.4.7	Separation of combustible materials from a PIS		Pass
6.4.7.1	General	(See tables 6.2.3.1 and 6.2.3.2)	Pass
6.4.7.2	Separation by distance		Pass
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers		Pass
6.4.8.1	Fire enclosure and fire barrier material properties		Pass
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure		Pass
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		Pass
6.4.8.3.1	Fire enclosure and fire barrier openings		Pass
6.4.8.3.2	Fire barrier dimensions		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.8.3.3	Top Openings in Fire Enclosure: dimensions (mm)	No top openings on unit.	Pass
	Needle Flame test		N/A
6.4.8.3.4	Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm)	No bottom openings.	N/A
	Flammability tests for the bottom of a fire enclosure		N/A
6.4.8.3.5	Integrity of the fire enclosure, condition met: a), b) or c)	Access only by Service Person.	N/A
6.4.8.4	Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating		N/A
6.5	Internal and external wiring		Pass
6.5.1	Requirements	Wire insulation rated VW-1.	Pass
6.5.2	Cross-sectional area (mm ²)		I
6.5.3	Requirements for interconnection to building wiring	(See Annex Q.)	N/A
6.6	Safeguards against fire due to connection to additional equipment		Pass
	External port limited to PS2 or complies with Clause Q.1		Pass

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

7	INJURY CAUSED BY HAZARDOUS SUBSTANCES		Pass
7.2	Reduction of exposure to hazardous substances	Certified battery	Pass
7.3	Ozone exposure		N/A
7.4	Use of personal safeguards (PPE)		N/A
	Personal safeguards and instructions :		
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010) :		
7.6	Batteries : (See Annex M)		Pass

8	MECHANICALLY-CAUSED INJURY		Pass
8.1	General		Pass
8.2	Mechanical energy source classifications		N/A
8.3	Safeguards against mechanical energy sources		N/A
8.4	Safeguards against parts with sharp edges and corners		Pass
8.4.1	Safeguards		N/A
8.5	Safeguards against moving parts		N/A
8.5.1	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
8.5.2	Instructional Safeguard :		
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	Large data storage equipment		N/A
8.5.4.2	Equipment having electromechanical device for destruction of media		N/A
8.5.4.2.1	Safeguards and Safety Interlocks : (See Annex F.4 and Annex K)		N/A
8.5.4.2.2	Instructional safeguards against moving parts		N/A
	Instructional Safeguard :		
8.5.4.2.3	Disconnection from the supply		N/A
8.5.4.2.4	Probe type and force (N) :		
8.5.5	High Pressure Lamps		N/A
8.5.5.1	Energy Source Classification		N/A
8.5.5.2	High Pressure Lamp Explosion Test : (See appended table 8.5.5.2)		N/A
8.6	Stability		N/A
8.6.1	Product classification		N/A
	Instructional Safeguard :		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.6.2	Static stability		N/A
8.6.2.2	Static stability test		N/A
	Applied Force		
8.6.2.3	Downward Force Test		N/A
8.6.3	Relocation stability test		N/A
	Unit configuration during 10° tilt		
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test (Applied Force)		N/A
	Position of feet or movable parts		
8.7	Equipment mounted to wall or ceiling		N/A
8.7.1	Mounting Means (Length of screws (mm) and mounting surface)		N/A
8.7.2	Direction and applied force		N/A
8.8	Handles strength		N/A
8.8.1	Classification		N/A
8.8.2	Applied Force		N/A
8.9	Wheels or casters attachment requirements		N/A
8.9.1	Classification		N/A
8.9.2	Applied force		
8.10	Carts, stands and similar carriers		N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A
	Instructional Safeguard		
8.10.3	Cart, stand or carrier loading test and compliance		N/A
	Applied force		
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Applied horizontal force (N).....		
8.10.6	Thermoplastic temperature stability (°C)		N/A
8.11	Mounting means for rack mounted equipment		N/A
8.11.1	General		N/A
8.11.2	Product Classification		N/A
8.11.3	Mechanical strength test, variable <i>N</i>		N/A
8.11.4	Mechanical strength test 250N, including end stops		N/A
8.12	Telescoping or rod antennas.....	(See Annex T)	N/A
	Button/Ball diameter (mm)		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
9	THERMAL BURN INJURY		Pass
9.2	Thermal energy source classifications	TS1 (enclosure)	Pass
9.3	Safeguard against thermal energy sources	Enclosure for ordinary person (T1)	Pass
9.4	Requirements for safeguards		Pass
9.4.1	Equipment safeguard		Pass
9.4.2	Instructional safeguard		N/A

10	RADIATION		Pass
10.2	Radiation energy source classification	Indicator LEDs are Exempt Group	Pass
10.2.1	General classification	RS1	Pass
10.3	Protection against laser radiation		N/A
	Laser radiation that exists equipment:		
	Normal, abnormal, single-fault :	(See attached laser test report)	N/A
	Instructional safeguard		
	Tool.....:		
10.4	Protection against visible, infrared, and UV radiation		N/A
10.4.1	General		N/A
10.4.1.a)	RS3 for Ordinary and instructed persons		N/A
10.4.1.b)	RS3 accessible to a skilled person.....:		N/A
	Personal safeguard (PPE) instructional safeguard		
10.4.1.c)	Equipment visible, IR, UV does not exceed RS1 . :		N/A
10.4.1.d)	Normal, abnormal, single-fault conditions :	(See appended table B.3 & B.4)	N/A
10.4.1.e)	Enclosure material employed as safeguard is opaque		N/A
10.4.1.f)	UV attenuation		N/A
10.4.1.g)	Materials resistant to degradation UV		N/A
10.4.1.h)	Enclosure containment of optical radiation.....:		N/A
10.4.1.i)	Exempt Group under normal operating conditions		N/A
10.4.2	Instructional safeguard.....:		N/A
10.5	Protection against x-radiation		N/A
10.5.1	X- radiation energy source that exists equipment :	(See appended table B.3 & B.4)	N/A
	Normal, abnormal, single fault conditions		N/A
	Equipment safeguards		N/A
	Instructional safeguard for skilled person		N/A
10.5.3	Most unfavourable supply voltage to give maximum radiation		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Abnormal and single-fault condition : 1	(See appended table B.3 & B.4)	N/A
	Maximum radiation (pA/kg) : 1		N/A
10.6	Protection against acoustic energy sources		N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output, dB(A) : 1		N/A
	Output voltage, unweighted r.m.s. : 1		N/A
10.6.4	Protection of persons		N/A
	Instructional safeguards : 1		N/A
	Equipment safeguard prevent ordinary person to RS2 : 1		
	Means to actively inform user of increase sound pressure..... : 1		
	Equipment safeguard prevent ordinary person to RS2 : 1		
10.6.5	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.5.1	Corded passive listening devices with analog input		N/A
	Input voltage with 94 dB(A) L_{Aeq} acoustic pressure output : 1		
10.6.5.2	Corded listening devices with digital input		N/A
	Maximum dB(A) : 1		
10.6.5.3	Cordless listening device		N/A
	Maximum dB(A) : 1		

B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		Pass
B.2	Normal Operating Conditions		Pass
B.2.1	General requirements : 1	(See Test Item Particulars and appended test tables)	Pass
	Audio Amplifiers and equipment with audio amplifiers : 1	(See Annex E)	N/A
B.2.3	Supply voltage and tolerances		Pass
B.2.5	Input test : 1	(See appended table B.2.5)	Pass
B.3	Simulated abnormal operating conditions		Pass
B.3.1	General requirements : 1	(See appended table B.3)	Pass
B.3.2	Covering of ventilation openings		Pass
B.3.3	D.C. mains polarity test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.3.4	Setting of voltage selector		N/A
B.3.5	Maximum load at output terminals		Pass
B.3.6	Reverse battery polarity		N/A
B.3.7	Abnormal operating conditions as specified in Clause E.2.		N/A
B.3.8	Safeguards functional during and after abnormal operating conditions		Pass
B.4	Simulated single fault conditions		N/A
B.4.2	Temperature controlling device open or short-circuited	(See appended table B.4)	N/A
B.4.3	Motor tests		N/A
B.4.3.1	Motor blocked or rotor locked increasing the internal ambient temperature	(See Clause G.5)	N/A
B.4.4	Short circuit of functional insulation		N/A
B.4.4.1	Short circuit of clearances for functional insulation		N/A
B.4.4.2	Short circuit of creepage distances for functional insulation		N/A
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short circuit and interruption of electrodes in tubes and semiconductors		N/A
B.4.6	Short circuit or disconnect of passive components		N/A
B.4.7	Continuous operation of components		N/A
B.4.8	Class 1 and Class 2 energy sources within limits during and after single fault conditions		N/A
B.4.9	Battery charging under single fault conditions ... :	(See Annex M)	N/A
C	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV radiation		N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure apparatus		N/A
C.2.4	Xenon-arc light exposure apparatus		N/A
D	TEST GENERATORS		N/A
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS		N/A
E.1	Audio amplifier normal operating conditions		N/A
	Audio signal voltage (V) :		
	Rated load impedance (Ω) :		
E.2	Audio amplifier abnormal operating conditions		N/A
F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS		Pass
F.1	General requirements		Pass
	Instructions – Language :	Only English reviewed.	
F.2	Letter symbols and graphical symbols		Pass
F.2.1	Letter symbols according to IEC60027-1		Pass
F.2.2	Graphic symbols IEC, ISO or manufacturer specific		Pass
F.3	Equipment markings		Pass
F.3.1	Equipment marking locations		Pass
F.3.2	Equipment identification markings		Pass
F.3.2.1	Manufacturer identification :		
F.3.2.2	Model identification :		
F.3.3	Equipment rating markings		Pass
F.3.3.1	Equipment with direct connection to mains		Pass
F.3.3.2	Equipment without direct connection to mains		N/A
F.3.3.3	Nature of supply voltage :		
F.3.3.4	Rated voltage :	See Cover Page	
F.3.3.4	Rated frequency :	See Cover Page	
F.3.3.6	Rated current or rated power :	See Cover Page	
F.3.3.7	Equipment with multiple supply connections		Pass
F.3.4	Voltage setting device		N/A
F.3.5	Terminals and operating devices		Pass
F.3.5.1	Mains appliance outlet and socket-outlet markings :		N/A
F.3.5.2	Switch position identification marking :		N/A
F.3.5.3	Replacement fuse identification and rating markings :		Pass
F.3.5.4	Replacement battery identification marking :	Only Service Person can change battery.	Pass
F.3.5.5	Terminal marking location		Pass
F.3.6	Equipment markings related to equipment classification		Pass
F.3.6.1	Class III Equipment		Pass

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.6.1.1	Protective earthing conductor terminal		N/A
F.3.6.1.2	Neutral conductor terminal		N/A
F.3.6.1.3	Protective bonding conductor terminals		N/A
F.3.6.2	Class II equipment (IEC60417-5172)		N/A
F.3.6.2.1	Class II equipment with or without functional earth		N/A
F.3.6.2.2	Class II equipment with functional earth terminal marking		N/A
F.3.7	Equipment IP rating marking :		I
F.3.8	External power supply output marking		N/A
F.3.9	Durability, legibility and permanence of marking		Pass
F.3.10	Test for permanence of markings		Pass
F.4	Instructions		Pass
	a) Equipment for use in locations where children not likely to be present - marking		Pass
	b) Instructions given for installation or initial use		Pass
	c) Equipment intended to be fastened in place		N/A
	d) Equipment intended for use only in restricted access area		N/A
	e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1		N/A
	f) Protective earthing employed as safeguard		N/A
	g) Protective earthing conductor current exceeding ES 2 limits		N/A
	h) Symbols used on equipment		N/A
	i) Permanently connected equipment not provided with all-pole mains switch		N/A
j)	j) Replaceable components or modules providing safeguard function		N/A
F.5	Instructional safeguards		N/A
	Where "instructional safeguard" is referenced in the test report it specifies the required elements, location of marking and/or instruction		N/A
G	COMPONENTS		Pass
G.1	Switches		N/A
G.1.1	General requirements		N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.2	Relays		N/A
G.2.1	General requirements	No mains relays.	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supply power		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.2.4	Mains relay, modified as stated in G.2		N/A
G.3	Protection Devices		Pass
G.3.1	Thermal cut-offs		N/A
G.3.1.1a) &b)	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
G.3.1.1c)	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Thermal cut-off connections maintained and secure		N/A
G.3.2	Thermal links		N/A
G.3.2.1a)	Thermal links separately tested with IEC 60691		N/A
G.3.2.1b)	Thermal links tested as part of the equipment		N/A
	Aging hours (H) :		
	Single Fault Condition :		
	Test Voltage (V) and Insulation Resistance (\wedge) :		
G.3.3	PTC Thermistors		N/A
G.3.4	Overcurrent protection devices		N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.5		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions :	(See appended Table B.4)	N/A
G.4	Connectors		Pass
G.4.1	Spacings	ES1	Pass
G.4.2	Mains connector configuration		N/A
G.4.3	Plug is shaped that insertion into mains socket- outlets or appliance coupler is unlikely		N/A
G.5	Wound Components		N/A
G.5.1	Wire insulation in wound components.....	Covered as an element of the Certified power supplies	N/A
G.5.1.2 a)	Two wires in contact inside wound component, angle between 45° and 90°		N/A
G.5.1.2 b)	Construction subject to routine testing		N/A
G.5.2	Endurance test on wound components		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Time (s)..... :		
	Temperature (°C)..... :		
G.5.2.3	Wound Components supplied by mains		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.3	Transformers		N/A
G.5.3.1	Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1)	Covered as an element of the Certified power supplies.	N/A
	Position		
	Method of protection		
G.5.3.2	Insulation		N/A
	Protection from displacement of windings		
G.5.3.3	Overload test	(See appended table B.3)	N/A
G.5.3.3.1	Test conditions		N/A
G.5.3.3.2	Winding Temperatures testing in the unit		N/A
G.5.3.3.3	Winding Temperatures - Alternative test method		N/A
G.5.4	Motors		N/A
G.5.4.1	General requirements		N/A
	Position		
G.5.4.2	Test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days)		
G.5.4.5	Running overload test for d.c. motors in secondary circuits		N/A
G.5.4.5.2	Tested in the unit		N/A
	Electric strength test (V).....		
G.5.4.5.3	Tested on the Bench - Alternative test method; test time (h)		N/A
	Electric strength test (V).....		
G.5.4.6	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature		N/A
	Electric strength test (V)		N/A
G.5.4.6.3	Tested on the bench - Alternative test method; test time (h)		N/A
	Electric strength test (V).....		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage		
G.6	Wire Insulation		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.6.1	General	Basic, Supplementary and Reinforced insulation covered in Certified power supplies.	N/A
G.6.2	Solvent-based enamel wiring insulation		N/A
G.7	Mains supply cords		N/A
G.7.1	General requirements		Pass
	Type :		
	Rated current (A) :		
	Cross-sectional area (mm ²), (AWG) :		
G.7.2	Compliance and test method		N/A
G.7.3	Cord anchorages and strain relief for non- detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N) :		
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm) .. :		
G.7.3.2.4	Strain relief comprised of polymeric material		N/A
G.7.4	Cord Entry..... :	(See appended table 5.4.11.1)	N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Mass (g) :		
	Diameter (m)..... :		
	Temperature (°C)..... :		
G.7.6	Supply wiring space		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Test with 8 mm strand		N/A
G.8	Varistors		N/A
G.8.1	General requirements	Covered as an element of the Certified power supplies.	N/A
G.8.2	Safeguard against shock		N/A
G.8.3	Safeguard against fire		N/A
G.8.3.2	Varistor overload test :		N/A
G.8.3.3	Temporary overvoltage :		N/A
G.9	Integrated Circuit (IC) Current Limiters		N/A
G.9.1 a)	Manufacturer defines limit at max. 5A.		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.9.1 b)	Limiters do not have manual operator or reset		N/A
G.9.1 c)	Supply source does not exceed 250 VA :		
G.9.1 d)	IC limiter output current (max. 5A) :		
G.9.1 e)	Manufacturers' defined drift :		
G.9.2	Test Program 1		N/A
G.9.3	Test Program 2		N/A
G.9.4	Test Program 3		N/A
G.10	Resistors		N/A
G.10.1	General requirements		N/A
G.10.2	Resistor test		N/A
G.10.3	Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable		N/A
G.10.3.1	General requirements		N/A
G.10.3.2	Voltage surge test		N/A
G.10.3.3	Impulse test		N/A
G.11	Capacitor and RC units		N/A
G.11.1	General requirements		N/A
G.11.2	Conditioning of capacitors and RC units		N/A
G.11.3	Rules for selecting capacitors	Covered as an element of the Certified power supplies.	N/A
G.12	Optocouplers		N/A
	Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results) :	Covered as an element of the Certified power supplies.	N/A
	Type test voltage Vini :		
	Routine test voltage, Vini,b :		
G.13	Printed boards		Pass
G.13.1	General requirements	covered as an element of the Certified power supplies.	N/A
G.13.2	Uncoated printed boards		Pass
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
	Compliance with cemented joint requirements (Specify construction) :		
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation :	(See appended table 5.4.4.5)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Number of insulation layers (pcs)..... :		
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2a)	Thermal conditioning		N/A
G.13.6.2b)	Electric strength test		N/A
G.13.6.2c)	Abrasion resistance test		N/A
G.14	Coating on components terminals		N/A
G.14.1	Requirements :		N/A
G.15	Liquid filled components		N/A
G.15.1	General requirements		N/A
G.15.2	Requirements		N/A
G.15.3	Compliance and test methods		N/A
G.15.3.1	Hydrostatic pressure test		N/A
G.15.3.2	Creep resistance test		N/A
G.15.3.3	Tubing and fittings compatibility test		N/A
G.15.3.4	Vibration test		N/A
G.15.3.5	Thermal cycling test		N/A
G.15.3.6	Force test		N/A
G.15.4	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
a)	Humidity treatment in accordance with sc5.4.8 – 120 hours		N/A
b)	Impulse test using circuit 2 with $U_c =$ to transient voltage		N/A
C1)	Application of ac voltage at 110% of rated voltage for 2.5 minutes		N/A
C2)	Test voltage		
D1)	10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer		N/A
D2)	Capacitance		
D3)	Resistance		
H	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General	Covered as an element of the Certified modem.	N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringling signal		N/A
H.3.1.1	Frequency (Hz) :		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
H.3.1.2	Voltage (V) :		
H.3.1.3	Cadence; time (s) and voltage (V) :		
H.3.1.4	Single fault current (mA): :		
H.3.2	Tripping device and monitoring voltage..... :		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage complied with		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V)..... :		
J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION		N/A
	General requirements		N/A
K	SAFETY INTERLOCKS		N/A
K.1	General requirements		N/A
K.2	Components of safety interlock safeguard mechanism	(See Annex G)	N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
	Compliance :	(See appended table B.4)	N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Compliance and Test method :		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements (type and circuit location) :		N/A
K.7.2	Overload test, Current (A) :		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test :	(See appended table 5.4.11)	N/A
L	DISCONNECT DEVICES		N/A
L.1	General requirements		Pass
L.2	Permanently connected equipment		Pass
L.3	Parts that remain energized		N/A
L.4	Single phase equipment		Pass
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		N/A
L.8	Multiple power sources		Pass
M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		Pass
M.1	General requirements		Pass

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.2	Safety of batteries and their cells		Pass
M.2.1	Requirements	Certified battery used.	Pass
M.2.2	Compliance and test method (identify method) .. :	Based on inspection.	Pass
M.3	Protection circuits		Pass
M.3.1	Requirements		Pass
M.3.2	Tests		Pass
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery	Battery protected by a Battery Protection Chip. to limit the current per the battery specifications.	Pass
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		Pass
M.3.3	Compliance	(See appended Tables and Annex M and M.4)	N/A
M.4	Additional safeguards for equipment containing secondary lithium battery		Pass
M.4.1	General		Pass
M.4.2	Charging safeguards	Battery protected by a Battery Protection Chip. to limit the current per the battery specifications.	Pass
M.4.2.1	Charging operating limits	Battery protected by a Battery Protection Chip. to limit the current per the battery specifications.	Pass
M.4.2.2a)	Charging voltage, current and temperature	(See Table M.4)	
M.4.2.2 b)	Single faults in charging circuitry	(See Annex B.4)	
M.4.3	Fire Enclosure		Pass
M.4.4	Endurance of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation		N/A
M.4.4.3	Drop and charge/discharge function tests		N/A
	Drop		N/A
	Charge		N/A
	Discharge		N/A
M.4.4.4	Charge-discharge cycle test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.4.4.5	Result of charge-discharge cycle test		N/A
M.5	Risk of burn due to short circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Compliance and Test Method (Test of P.2.3)		N/A
M.6	Prevention of short circuits and protection from other effects of electric current		N/A
M.6.1	Short circuits		N/A
M.6.1.1	General requirements		N/A
M.6.1.2	Test method to simulate an internal fault		N/A
M.6.1.3	Compliance (Specify M.6.1.2 or alternative method)		N/A
M.6.2	Leakage current (mA)		N/A
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
M.7.2	Compliance and test method		N/A
M.8	Protection against internal ignition from external spark sources of lead acid batteries		N/A
M.8.1	General requirements		N/A
M.8.2	Test method		N/A
M.8.2.1	General requirements		N/A
M.8.2.2	Estimation of hypothetical volume V_z (m ³ /s)..... :		
M.8.2.3	Correction factors :		
M.8.2.4	Calculation of distance d (mm) :		
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing) :		N/A
N	ELECTROCHEMICAL POTENTIALS		Pass
	Metal(s) used :	Pollution degree considered	
O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES		N/A
	Figures O.1 to O.20 of this Annex applied :		
P	SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS		Pass
P.1	General requirements		Pass
P.2.2	Safeguards against entry of foreign object		Pass
	Location and Dimensions (mm) :		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
P.2.3	Safeguard against the consequences of entry of foreign object		Pass
P.2.3.1	Safeguards against the entry of a foreign object		N/A
	Openings in transportable equipment		N/A
	Transportable equipment with metalized plastic parts		N/A
P.2.3.2	Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard)		N/A
P.3	Safeguards against spillage of internal liquids		N/A
P.3.1	General requirements		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Safeguards effectiveness		N/A
P.4	Metallized coatings and adhesive securing parts		N/A
P.4.2 a)	Conditioning testing		N/A
	Tc (°C)		
	Tr (°C)		
	Ta (°C)		
P.4.2 b)	Abrasion testing	(See G.13.6.2)	N/A
P.4.2 c)	Mechanical strength testing	(See Annex T)	N/A
Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		Pass
Q.1	Limited power sources	(See Annex Q.1). Signal only.	Pass
Q.1.1 a)	Inherently limited output	(See Annex Q.1). Signal only.	Pass
Q.1.1 b)	Impedance limited output	(See Annex Q.1). Signal only.	Pass
	- Regulating network limited output under normal operating and simulated single fault condition		N/A
Q.1.1 c)	Overcurrent protective device limited output		N/A
Q.1.1 d)	IC current limiter complying with G.9		N/A
Q.1.2	Compliance and test method		N/A
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A)		
	Current limiting method.....		
R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General requirements		N/A
R.2	Determination of the overcurrent protective device and circuit		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
R.3	Test method Supply voltage (V) and short-circuit current (A)).		N/A
S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material		
	Wall thickness (mm)		
	Conditioning (°C)		
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material		
	Wall thickness (mm)		
	Conditioning (°C)		
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	Test specimen does not show any additional hole		N/A
S.3	Flammability test for the bottom of a fire enclosure		N/A
	Samples, material		
	Wall thickness (mm)		
	Cheesecloth did not ignite		N/A
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material		
	Wall thickness (mm)		
	Conditioning (test condition), (°C)		
	Test flame according to IEC 60695-11-20 with conditions as set out		N/A
	After every test specimen was not consumed completely		N/A
	After fifth flame application, flame extinguished within 1 min		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
T	MECHANICAL STRENGTH TESTS		Pass
T.1	General requirements		Pass
T.2	Steady force test, 10 N	⋮ (See appended table T.2)	N/A
T.3	Steady force test, 30 N	⋮ No internal barriers. (See appended table T3)	N/A
T.4	Steady force test, 100 N	⋮ (See appended table T4)	N/A
T.5	Steady force test, 250 N	⋮ Unit enclosure comprised of substantial metal. (See appended table T5)	N/A
T.6	Enclosure impact test	Unit enclosure comprised of substantial metal. (See appended table T6)	N/A
	Fall test		N/A
	Swing test		N/A
T.7	Drop test	⋮ (See appended table T7)	N/A
T.8	Stress relief test	⋮ (See appended table T8)	N/A
T.9	Impact Test (glass)		N/A
T.9.1	General requirements		N/A
T.9.2	Impact test and compliance		N/A
	Impact energy (J).....	⋮	
	Height (m).....	⋮	
T.10	Glass fragmentation test.....	⋮ (See sub-clause 4.4.4.9)	N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm)	⋮	
U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
U.1	General requirements		N/A
U.2	Compliance and test method for non-intrinsically protected CRTs		N/A
U.3	Protective Screen	⋮ (See Annex T)	N/A
V	DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)		Pass
V.1	Accessible parts of equipment		Pass
V.2	Accessible part criterion		Pass

找不到參照來源。

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.1.2 TABLE: List of critical components					
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ₁

IEC 62368-1					
Clause	Requirement + Test			Result - Remark	Verdict
Enclosure	Chi Mei Corp. or equivalent	PS-765A or equivalent	Rated minimum V-0. Overall 23 cm wide by 24 cm high by 12 cm deep. Minimum 2.1 mm thick. Two halves secured by screws.	UL 94	UL
Enclosure (Battery Compartment)	Chi Mei Corp. or equivalent	PS-765A or equivalent	Rated minimum V-0. Overall 23 cm wide by 24 cm high by 12 cm deep. Minimum 2.1 mm thick. Two halves secured by screws.	UL 94	UL
External power supply	Adaptor Technology	ATS050T-P190	Rated 100-240 Vac, 50/60 Hz, 1.2 A. Output rated 19 Vdc, 2.64 A LPS.	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 UL62368-1, 2 nd Ed.	NEMKO UL
Input Connector	Various	Various	--	--	--
Printed Wiring Board	Various	Various	V-0	UL94, UL796	UL
Battery Charger U15)	Linear Technology	LTC4007EG N#PBF	Input rated 12.6 Vdc. Output rated 4 A	--	--
Lithium Battery	NINGBO EXPOCELL TECH	LIP-4S2Px18650-22PTMol39	Rated 14.6Vdc, Max Charging Current 4300mAh	IEC62133-2:2017	CB Report TUV-SUD
USBConnector	Various	Various	--	--	--
Speaker Connector	Various	Various	--	--	--
HDMI Connector	Various	Various	--	--	--
Supplementary information:					
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					
Description line content is optional. Main line description needs to clearly detail the component used for testing					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.8.4, 4.8.5	TABLE: Lithium coin/button cell batteries mechanical tests			N/A
(The following mechanical tests are conducted in the sequence noted.)				
4.8.4.2	TABLE: Stress Relief test			
Part		Material	Oven Temperature (°C)	Comments
4.8.4.3	TABLE: Battery replacement test			
Battery part no.		:		—
Battery Installation/withdrawal		Battery Installation/Removal Cycle		Comments
		1		
		2		
		3		
		4		
		5		
		6		
		8		
		9		
10				
4.8.4.4	TABLE: Drop test			
Impact Area		Drop Distance	Drop No.	Observations
			1	
			2	
			3	
4.8.4.5	TABLE: Impact			
Impacts per surface		Surface tested	Impact energy (Nm)	Comments
4.8.4.6	TABLE: Crush test			
Test position		Surface tested	Crushing Force (N)	Duration force applied (s)
Supplementary information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.8.5	TABLE: Lithium coin/button cell batteries mechanical test result			N/A
Test position	Surface tested	Force (N)	Duration force applied (s)	
Supplementary information:				

5.2	Table: Classification of electrical energy sources						Pass
5.2.2.2 – Steady State Voltage and Current conditions							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				U (Vrms or Vpk)	I (Apk or Arms)	Hz	
#	#	#	Normal	#	#	#	N/A
			Abnormal	#	#	#	
			Single fault – SC/OC	#	#	#	
-	-	-	Normal	-	-	-	-
			Abnormal	-	-	-	
			Single fault – SC/OC	-	-	-	
5.2.2.3 - Capacitance Limits							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters		ES Class	
				Capacitance, nF	Upk (V)		
-	-	-	Normal	-	-	N/A	
			Abnormal	-	-		
			Single fault – SC/OC	-	-		
5.2.2.4 - Single Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Duration (ms)	Upk (V)	lpk (mA)	
-	-	-	Normal	-	-	-	N/A
			Abnormal	-	-	-	
			Single fault – SC/OC	-	-	-	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.2.2.5 - Repetitive Pulses

No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Off time (ms)	Upk (V)	Ipk (mA)	
-	-	-	Normal	-	-	-	N/A
			Abnormal	-	-	-	
			Single fault – SC/OC	-	-	-	

Test Conditions:

Normal –

Abnormal -

Supplementary information: SC=Short Circuit, OC=Short Circuit

#-Evaluated during component power supply investigation. See Energy Source Diagram for ES levels considered.

[illegible]

[illegible]

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.10.2 TABLE: Vicat softening temperature of thermoplastics			N/A
Penetration (mm)	:		
Object/ Part No./Material	Manufacturer/trademark	T softening (°C)	
-	-	-	
-	-	-	
supplementary information:			

5.4.1.10.3 TABLE: Ball pressure test of thermoplastics			N/A
Allowed impression diameter (mm)	:	δ 2 mm	
Object/Part No./Material	Manufacturer/trademark	Test temperature (°C)	Impression diameter (mm)
-	-	-	-
-	-	-	-
-	-	-	-
Supplementary information:			

5.4.2.2, 5.4.2.4 and 5.4.3	TABLE: Minimum Clearances/Creepage distance						N/A
Clearance (cl) and creepage distance (cr) at/of/between:	Up (V)	U r.m.s. (V)	Frequency (kHz) ¹	Required cl (mm)	cl (mm) ²	Required ³ cr (mm)	cr (mm)
Supplementary information:							
Note 1: Only for frequency above 30 kHz							
Note 2: See table 5.4.2.4 if this is based on electric strength test							
Note 3: Provide Material Group							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.2.3	TABLE: Minimum Clearances distances using required withstand voltage			N/A
	Overvoltage Category (OV):			
	Pollution Degree:			
Clearance distanced between:		Required withstand voltage	Required cl (mm)	Measured cl (mm)
Supplementary information:				

5.4.2.4	TABLE: Clearances based on electric strength test			N/A
Test voltage applied between:		Required cl (mm)	Test voltage (kV) peak/ r.m.s. / d.c.	Breakdown Yes / No
Supplementary information:				

5.4.4.2, 5.4.4.5 c) 5.4.4.9	TABLE: Distance through insulation measurements					N/A
Distance through insulation di at/of:	Peak voltage (V)	Frequency (kHz)	Material	Required DTI (mm)	DTI (mm)	
Supplementary information: Also, covered as an element of the certified power supplies.						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.9 TABLE: Electric strength tests			N/A
Test voltage applied between:	Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No
Functional:			
Basic/supplementary:			
Routine Tests:			
Supplementary information:			
.			

5.5.2.2 TABLE: Stored discharge on capacitors					N/A
Supply Voltage (V), Hz	Test Location	Operating Condition (N, S)	Switch position On or off	Measured Voltage (after 2 seconds)	ES Classification

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<p>Supplementary information:</p> <p>X-capacitors installed for testing are:</p> <p><input type="checkbox"/> bleeding resistor rating:</p> <p><input type="checkbox"/> ICX:</p> <p>Notes:</p> <p>A. Test Location:</p> <p>Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth</p> <p>B. Operating condition abbreviations:</p> <p>N – Normal operating condition (e.g., normal operation, or open fuse); S –Single fault condition</p>			

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.6.6.2 TABLE: Resistance of protective conductors and terminations				N/A
Accessible part	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)
Supplementary information:				

5.7.2.2, 5.7.4	TABLE: Earthed accessible conductive part		N/A
Supply voltage			—
Location		Test conditions specified in 6.1 of IEC 60990 or Fault Condition No in IEC 60990 clause 6.2.2.1 through 6.2.2.8, except for 6.2.2.7	Touch current (mA)
		2*	
		3	
		4	
		5	
		6	
		8	
Supplementary Information:			
Notes: [1] Supply voltage is the anticipated maximum Touch Voltage [2] Earthed neutral conductor [Voltage differences less than 1% or more] [3] Specify method used for measurement as described in IEC 60990 sub-clause 4.3 [4] IEC60990, sub-clause 6.2.2.7, Fault 7 not applicable. [5] (*) IEC60990, sub-clause 6.2.2.2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided. PS1:			

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

6.2.2 Table: Electrical power sources (PS) measurements for classification					N/A
Source	Description	Measurement	Max Power after 3 s	Max Power after 5 s ^(*)	PS Classification
		V _A (V) :	-	-	
		I _A (A) :	-	-	

Supplementary Information:

(*) Measurement taken only when limits at 3 seconds exceed PS1 limits

6.2.3.1 Table: Determination of Potential Ignition Sources (Arcing PIS)				N/A
Location	Open circuit voltage After 3 s (V _p)	Measured r.m.s current (I _{rms})	Calculated value (V _p x I _{rms})	Arcing PIS? Yes / No

Supplementary information:

An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V_p) and normal operating condition rms current (I_{rms}) is greater than 15.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

6.2.3.2 Table: Determination of Potential Ignition Sources (Resistive PIS)					N/A
Circuit Location (x-y)	Operating Condition (Normal / Describe Single Fault)	Measured wattage or VA During first 30 s (W / VA)	Measured wattage or VA After 30 s (W / VA)	Protective Circuit, Regulator, or PTC Operated? Yes / No (Comment)	Resistive PIS? Yes/No
<p>Supplementary Information:</p> <p>A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter.</p> <p>If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification.</p> <p>A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, or (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.</p>					

8.5.5 TABLE: High Pressure Lamp		N/A
Description	Values	Energy Source Classification
Lamp type : :		—
Manufacturer : :		—
Cat no. : :		—
Pressure (cold) (MPa) : :		--
Pressure (operating) (MPa) : :		--
Operating time (minutes) : :		—
Explosion method : :		—
Max particle length escaping enclosure (mm) . : :		--
Max particle length beyond 1 m (mm) : :		--
Overall result : :		
Supplementary information:		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5		TABLE: Input test						Pass
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
	-	-	-	-	-	-	-	
IEC 62368-1								
Clause	Requirement + Test				Result - Remark		Verdict	
B.2.5		TABLE: Input test						Pass
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
Supplementary information:								
Equipment may be have rated current or rated power or both. Both should be measured								

B.3 TABLE: Abnormal operating condition tests								N/A
Ambient temperature (°C) :								
Power source for EUT: Manufacturer, model/type, output rating :						See Below		
Component No.	Abnormal Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation

Supplementary information:
Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column “Abnormal/Fault.” Specify if test condition by indicating “Abnormal” then the condition for a Clause B.3 test or “Single Fault” then the condition for Clause B.4.

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.4 TABLE: Fault condition tests								N/A
Ambient temperature (°C)								
Power source for EUT: Manufacturer, model/type, output rating . :								
Component No.	Fault Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation
Supplementary information:								
(1): This test was not conducted because there was no voltage measured at the USB mini port.								

Annex M	TABLE: Batteries								Pass	
The tests of Annex M are applicable only when appropriate battery data is not available									N/A	
Is it possible to install the battery in a reverse polarity position?								⋮	No	Pass
	Non-rechargeable batteries			Rechargeable batteries						
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging		
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	
Max. current during normal condition	-	-	-					-	-	
Max. current during fault condition	-	-	-					-	-	
Test results:									Verdict	
- Chemical leaks									-	
- Explosion of the battery									-	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
- Emission of flame or expulsion of molten metal			-
- Electric strength tests of equipment after completion of tests			-
Supplementary information: Ref Test Results in attached CB Report. Certified Battery Protection Chip provides reverse charging current protection to coin type Battery.			

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Annex M.4	Table: Additional safeguards for equipment containing secondary lithium batteries				N/A
Battery/Cell No.	Test conditions	Measurements			Observation
		U	I (A)	Temp (C)	
	Normal				
	Abnormal				
	Single fault –SC/OC				
	Normal				
	Abnormal				
	Single fault – SC/OC				
Supplementary Information:					
Battery identification	Charging at T_{lowest} (°C)	Observation	Charging at T_{highest} (°C)	Observation	
Supplementary Information:					

Annex Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)					Pass
Note: Measured UOC (V) with all load circuits disconnected:						
Output Circuit	Components	U _{oc} (V)	I _{sc} (A)		S (VA)	
			Meas.	Limit	Meas.	Limit
	USB mini port	0.0	--	--	--	--
	HDMI port	0.0	--	--	--	--
	Audio	0.0	--	--	--	--

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
Supplementary Information: SC=Short circuit, OC=Open circuit						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

T.2, T.3, T.4, T.5	TABLE: Steady force test					N/A
Part/Location	Material	Thickness (mm)	Force (N)	Test Duration (sec)	Observation	
Supplementary information: Based on substantial metal enclosure construction, steady force test was not deemed necessary.						

T.6, T.9	TABLE: Impact tests					N/A
Part/Location	Material	Thickness (mm)	Vertical distance (mm)	Observation		
Supplementary information: Based on substantial metal enclosure construction, impact test was not deemed necessary.						

T.7	TABLE: Drop tests					N/A
Part/Location	Material	Thickness (mm)	Drop Height (mm)	Observation		
Supplementary information:						

T.8	TABLE: Stress relief test					N/A
Part/Location	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
Supplementary information: Unit enclosure is metal.						

List of test equipment used:

A completed list of used test equipment shall be provided in the Test Reports when a Manufacturer Testing Laboratory according to TMP/CTF stage 1 or WMT/CTF stage 2 procedure has been used.

[illegible]

Enclosures:

ATTACHMENT TO TEST REPORT IEC 62368-1

DENMARK NATIONAL DIFFERENCES

Audio/video, information and communication technology equipment –

Part 1: Safety requirements

Differences according to: DS/EN 62368-1:2014

Attachment Form No.....: DK_ND_IEC62368_1B

Attachment Originator: UL (Demko)

Master Attachment.....: 2014-10

Copyright © 2014 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

	National Differences		
4.1.15	<p>To the end of the subclause the following is added:</p> <p>Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows: “Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord.”</p>		N/A
5.2.2.2	<p>After the 2nd paragraph add the following: A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>		N/A
5.6.1	<p>Add to the end of the subclause:</p> <p>Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment.</p> <p>Justification: In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.5	To the end of the subclause the following is added: The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.		N/A
5.7.6.2	To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA.		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	<p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p>Justification: Heavy Current Regulations, Section 6c</p>		N/A

ATTACHMENT TO TEST REPORT IEC 62368-1		
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES		
(Audio/video, information and communication technology equipment Part 1: Safety requirements)		
Differences according to	:	EN 62368-1:2014
Attachment Form No.	:	EU_GD_IEC62368_1B
Attachment Originator	:	Intertek Semko AB
Master Attachment	:	Date (2015-08)
Copyright © 2015 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE)		

	CENELEC COMMON MODIFICATIONS (EN)		
1	NOTE Z1		N/A
4.Z1	Protective devices included as integral parts of the equipment or as parts of the building installation:		N/A
	a) Included as parts of the equipment		N/A
	b) For components in series with the mains; by devices in the building installation		N/A
	c) For pluggable type B or permanently connected; by devices in the building installation		N/A
5.4.2.3.2.4	Interconnection with external circuit		N/A
10.2.1	Additional requirements in 10.5.1		N/A
10.5.1	RS1 compliance measurement conditions		N/A
10.6.2.1	EN 71-1:2011, 4.20 and methods and distances		N/A
10.Z1	Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz		N/A
G.7.1	NOTE Z1		N/A

ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		
4.1.15	Denmark, Finland, Norway and Sweden: Class I pluggable equipment type A marking		N/A
4.7.3	United Kingdom: Torque test socket-outlet BS 1363, and the plug part BS 1363.		N/A
5.2.2.2	Denmark: Warning for high touch current		N/A
5.4.11.1 and Annex G	Finland and Sweden: Separation of the telecommunication network from earth		N/A
5.5.2.1	Norway: Capacitors rated for the applicable line-to-line voltage (230 V).		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.6	Finland, Norway and Sweden: Resistors used as basic safeguard or bridging basic insulation comply with G.10.1 and G.10.2.		N/A
5.6.1	Denmark: Protection for pluggable equipment type A; integral part of the equipment		N/A
5.6.4.2.1	Ireland and United Kingdom: The protective current rating is taken to be 13 A		N/A
5.6.5.1	Ireland and United Kingdom: Conductor sizes of flexible cords to be accepted by terminals for equipment rated 10 A to 13 A		N/A
5.7.5	Denmark: The installation instruction affixed to the equipment if high protective conductor current		N/A
5.7.6.1	Norway and Sweden: Television distribution system isolation text in user manual		N/A
5.7.6.2	Denmark: Warning for high touch current		N/A
B.3. 1 and B.4	Ireland and United Kingdom: Tests conducted using an external miniature circuit breaker or protective devices included as an integral part of the direct plug-in equipment		N/A
G.4.2	Denmark: Appliances rated ≤ 13 A provided with a plug according to DS 60884-2-D1:2011.		N/A
	Class I equipment provided with socket-outlets provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.		N/A
	If a single-phase equipment having rated >13 A or poly-phase equipment provided with a supply cord with a plug, plug in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.		N/A
	Mains socket outlets intended for providing power to Class II apparatus rated 2,5 A in accordance with DS 60884-2-D1:2011 standard sheet DKA 1-4a.		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Other current rating socket outlets in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.		N/A
	Mains socket-outlets with earth in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a		N/A
G.4.2	United Kingdom: The plug part of direct plug-in equipment assessed to BS 1363		N/A
G.7.1	United Kingdom: Equipment fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768		N/A
G.7.1	Ireland: Apparatus provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use		N/A
G.7.2	Ireland and United Kingdom: A power supply cord for equipment which is rated over 10 A and up to and including 13 A.		N/A

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		
10.5.2	Germany: Cathode ray tube intended for the display of visual images, authorization or application of type approval and marking.		N/A
F.1	Italy: The power consumption in Watts (W) indicated on TV receiver and in instruction for use		N/A
	TV receivers provided with an instruction for use, schematic diagrams and adjustments procedure in Italian language.		N/A
	Marking for controls and terminals in Italian language.		N/A
	Conformity declaration according to the above requirements in the instruction manual		N/A
	First importers of TV receivers manufactured outside EEC previous conformity certification to the Italian Post Ministry and Certification number on the backcover.		N/A

ATTACHMENT TO TEST REPORT IEC 62368-1 2th Ed. U.S.A. NATIONAL DIFFERENCES

Audio/video, information and communication technology equipment – Part 1: Safety requirements

Differences according to	⋮	CSA/UL 62368-1:2014
Attachment Form No.	⋮	US&CA_ND_IEC623681B
Attachment Originator	⋮	UL(US)
Master Attachment	⋮	Date 2015-06
Copyright © 2015 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.		

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

IEC 62368-1 - US and Canadian National Differences Special National Conditions based on Regulations and Other National Differences			
1.1	All equipment is to be designed to allow installation according to the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CEC), Part I, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2. Also, for such equipment marked or otherwise identified, installation is allowed per the Standard for the Protection of Information Technology Equipment, ANSI/NFPA 75.		N/A
1.4	Additional requirements apply to some forms of power distribution equipment, including sub-assemblies.		N/A
4.1.17	<i>For lengths exceeding 3.05 m, external interconnecting flexible cord and cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the NEC.</i>		N/A
	<i>For lengths 3.05 m or less, external interconnecting flexible cord and cable assemblies that are not types specified in the NEC generally are required to have special construction features and identification markings.</i>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

4.8	Lithium coin / button cell batteries have modified special construction and performance requirements.		N/A
5.6.3	Protective earthing conductors comply with the minimum conductor sizes in Table G.5, except as required by Table G.7ADV.1 for cord connected equipment, or Annex DVH for permanently connected equipment		N/A
5.7.7	Equipment intended to receive telecommunication ringing signals complies with a special touch current measurement tests.		N/A
6.5.1	PS3 wiring outside a fire enclosure complies with single fault testing in B.4, or be current limited per one of the permitted methods.		N/A
Annex F (F.3.3.8)	Output terminals provided for supply of other equipment, except mains, supply are marked with a maximum rating or references to which equipment it is permitted to be connected.		Pass
Annex G (G.7.1)	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.		N/A
Annex G (G.7.3)	Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.		N/A
	Flexible power supply cords are required to be compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.		N/A
Annex G (G.7.5)	Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement. Power supply cords are required to be no longer than 4.5 m in length if used in ITE Rooms.		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Clause	Requirement + Test	Result - Remark	Verdict
Annex H.2	Continuous ringing signals under normal operating conditions up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.		N/A
Annex H.4	For circuits with other than ringing signals and with voltages exceeding 42.4 V _{peak} or 60 V d.c., the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.		N/A
Annex M	Battery packs for stationary applications comply with special component requirements.		N/A
Annex DVA (1)	Equipment intended for use in spaces used for environmental air are subjected to special flammability requirements for heat and visible smoke release.		N/A
	For ITE room applications, automated information storage systems with combustible media greater than 0.76 m ³ (27 cu ft) have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.		N/A
	Consumer products designed or intended primarily for children 12 years of age or younger are subject to additional requirements in accordance with U.S. & Canadian Regulations.		N/A
	Baby monitors additionally comply with ASTM F2951, Consumer Safety Specification for Baby Monitors.		N/A
Annex DVA (5.6.3)	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Annex DVA (6.3)	The maximum quantity of flammable liquid stored in equipment complies with NFPA 30.		N/A
Annex DVA (6.4.8)	For ITE room applications, enclosures with combustible material measuring greater than 0.9 m ² (10 sq ft) or a single dimension greater than 1.8 m (6 ft) have a flame spread rating of 50 or less. For equipment with the same dimensions for other applications, an external surface that is not a fire enclosure requires a min. flammability classification of V-1.		N/A
Annex DVA (10.3.1)	Equipment with lasers meets the U.S. Code of Federal Regulations 21 CFR 1040 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (10.5.1)	Equipment that produces ionizing radiation complies with the U.S. Code of Federal Regulations, 21 CFR 1020 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (F.3.3.3)	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings. Additional considerations apply for voltage ratings that exceed the attachment cap rating or are lower than the "Normal Operating Condition" in Table 2 of CAN/CSA C22.2 No. 235."		N/A
Annex DVA (F.3.3.5)	Equipment identified for ITE (computer) room installation is marked with the rated current		N/A
Annex DVA (G.1)	Vertically-mounted disconnect switches and circuit breakers have the "on" position indicated by the handle in the up position		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Annex DVA (G.3.4)	Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.		N/A
Annex DVA (G.4.2)	Equipment with isolated ground (earthing) receptacles complies with NEC 250.146(D) and CEC 10-112 and 10-906(8).		N/A
Annex DVA (G.4.3)	Where a fuse is used to provide Class 2 or Class 3 current limiting, it is not operator-accessible unless it is non-interchangeable.		N/A
Annex DVA (G.5.3)	Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection.		N/A
Annex DVA (G.5.4)	Motor control devices are required for cord-connected equipment with a mains-connected motor if the equipment is rated more than 12 A, or if the equipment has a nominal voltage rating greater than 120 V, or if the motor is rated more than 1/3 hp (locked rotor current over 43 A).		N/A
Annex DVA (Annex M)	For ITE room applications, equipment with battery systems capable of supplying 750 VA for five minutes have a battery disconnect means that may be connected to the ITE room remote power-off circuit.		N/A
Annex DVA (Q)	Wiring terminals intended to supply Class 2 outputs according to the NEC or CEC Part 1 are marked with the voltage rating and "Class 2" or equivalent; marking is located adjacent to the terminals and visible during wiring.		N/A
Annex DVB (1)	Additional requirements apply for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities.		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------


Annex DVC (1)	Additional requirements apply for equipment intended for mounting under kitchen cabinets.		N/A
Annex DVE (4.1.1)	Some equipment, components, sub-assemblies and materials associated with the risk of fire, electric shock, or personal injury have component or material ratings in accordance with the applicable national (U.S. and Canadian) component or material requirements. Components required to comply include: appliance couplers, attachment plugs, battery back-up systems, battery packs, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), power supply cords, direct plug-in equipment, electrochemical capacitor modules (energy storage modules with ultra-capacitors), enclosures (outdoor), flexible cords and cables, fuses (branch circuit), ground-fault current interrupters, interconnecting cables, data storage equipment, printed wiring, protectors for communications circuits, receptacles, surge protective devices, vehicle battery adapters, wire connectors, and wire and cables.		N/A
Annex DVH	Equipment for permanent connection to the mains supply is subjected to additional requirements.		N/A
Annex DVH (DVH.1)	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains are in accordance with the NEC/CEC.		N/A
Annex DVH (DVH.3.2)	Terminals for permanent wiring, including protective earthing terminals, are suitable for U.S./Canadian wire gauge sizes, rated 125 percent of the equipment rating, and are specially marked when specified.		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Annex DVH (DVH.3.2)	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm ²).		N/A
Annex DVH (DVH.4)	Permanently connected equipment is required to have a suitable wiring compartment and wire bending space.	SELV.	N/A
Annex DVH (DVH 5.5)	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, complies with special earthing, wiring, marking and installation instruction requirements.		N/A
Annex DVI (6.7)	Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses.		N/A
Annex DVJ (10.6.1)	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.		N/A

BLOCK DIAGRAM

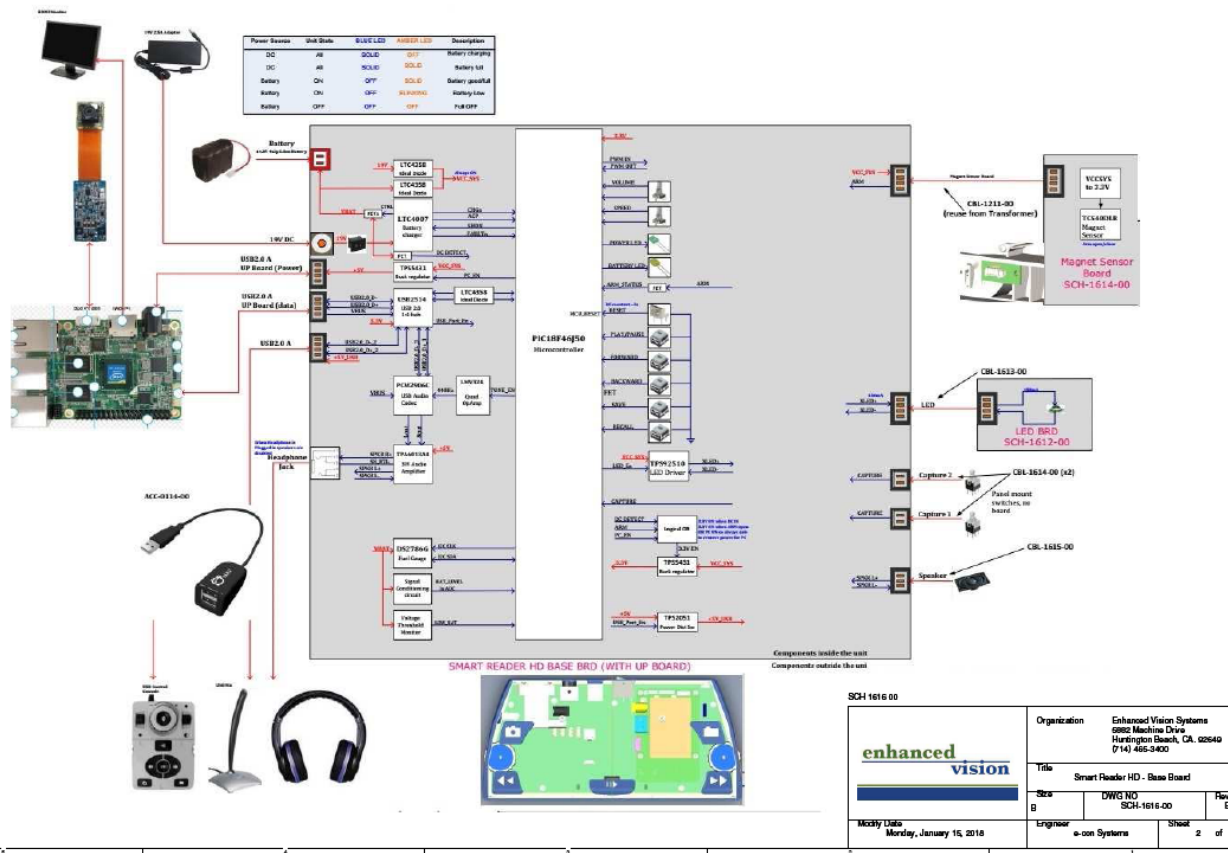

[illegible]

DOWN STREAM PORTS

The diagram illustrates the USB Downstream Port circuit. It features a USB connector J15 (67643-0910) connected to a USB hub IC 744231091. The hub has four downstream ports, each with a 1.5k pull-up resistor (R427-R430) to VCC and a 1.5k pull-down resistor (R423-R426) to GND. The hub is also connected to a 5V regulator (TP4) and a 1.5k pull-up resistor (R422) to VCC. The hub's D+ and D- pins are connected to the D+ and D- pins of the USB connector. The hub's VCC and GND pins are connected to the VCC and GND pins of the USB connector.

[illegible]









UL Product iQ
UL'S NEXT GENERATION CERTIFICATIONS SEARCH
The same trusted data in a modern search engine.

**NOW
AVAILABLE**

▶ LEARN MORE

QQJQ.E225703

Power Supplies for Use with Audio/Video, Information and Communication Technology Equipment

[Page Bottom](#)

Power Supplies for Use with Audio/Video, Information and Communication Technology Equipment

[See General Information for Power Supplies for Use with Audio/Video, Information and Communication Technology Equipment](#)

ADAPTER TECHNOLOGY CO LTD

E225703

6F-9

No. 258 Liancheng Rd

Zhonghe District

New Taipei, 235 TAIWAN

AC Adapter, Model(s) 172PWR6F2, APD045T-A200

AC Adapter, Model(s) ATS012T-WyyyU, yyy can be 033, 050, 051, 060, 084, 090, 120, 135, 150, 180, 240

AC Adapter, Model(s) ATS018T-Axxx (c), ATS018T-Pxxx (a), ATS018T-WxxxU (c), ATS018T-WxxxV (c), ATS018T-WxxxV1 (c), ATS024T-Ayyy (d), ATS024T-Pyyy (b), ATS024T-WyyyU (d), ATS024T-WyyyV (d), ATS024T-WyyyV1 (d), ATS036T-Ayyy, ATS036T-Wyyy z (\$!)

AC Adapter, Model(s) ATS036T-Pxxx (xxx can be 050, 075, 085, 090, 120, 121, 135, 150, 160, 180, 240 or 480 for dc output voltage)

AC Adapter, Model(s) ATS040T-Axxx#, ATS040T-Pxxx#, ATS048T-A480

AC Adapter, Model(s) ATS050T-Axxx(xxx can be 090, 091 120, 121, 135, 150, 180, 190, 240 or 480 (for output voltage)

AC Adapter, Model(s) **ATS050T-Pxxx** (xxx can be 090, 091 120, 121, 135, 150, 180, **190**, 240 or 480 (for output voltage)

REQUIREMENTS

The basic standard used to investigate products in this category is [ANSI/UL 62368-1](#), "Audio/Video, Information and Communication Technology Equipment - Part 1: Safety Requirements."

All low-voltage outputs are Class 1 electrical energy sources (ES1) as defined in [ANSI/UL 62368-1](#). An output marked "LPS," "PS1" or "PS2" has been determined to have an output level at or below the limited power-source level, Class 1 electrical power source (PS1) or Class 2 electrical power source (PS2), respectively, specified in [ANSI/UL 62368-1](#), as it relates to the requirements for equipment supplied by the output.



ZERTIFIKAT CERTIFICATE

GS-1503-282518-000



Seite / Page 1 / 2

Gültigkeit *Expiry Date* **01.04.2020**

Genehmigungsinhaber
Licence Holder **Adapter Technology Co., Ltd.**
6F-9, No.258, Liancheng Rd.,
Zhonghe District, New Taipei City,
235, Taiwan

Der Inhaber der Genehmigung ist berechtigt das Nemko GS-Zeichen auf dem hier beschriebenen Produkt für die Gültigkeitsdauer des Zertifikats anzubringen.
Weitere Hinweise siehe unten.

Fertigungsstätte
Manufacturing Plant **Boayang Electronics Co., Ltd.**
Di Feng Gong Ye Qu 2 Hao,
Xiasha Liuwu Village, Shipai Town,
Dong Guan City, Guang Dong Province,
China

The holder of this certificate is entitled to use the Nemko GS-mark on the product described below. The Nemko GS-mark is only to be used within the validity of this certificate.
For further notice, see below.

Geprüft nach
Tested according to **EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013;**
PAK Anforderungen / PAH requirements AfPS GS 2014:01 PAK

Zertifiziertes Produkt
Certified Product **Netzteil / AC Adapter**

Bezeichnung
Type Designation

ATS050T-Pxxx

Eingang: 1,2 A max., 100 – 240 V~, 50 – 60 Hz, Klasse I
DC-Ausgang und zusätzliche Informationen auf Seite 2.
Handelsname: ADAPTER TECH.

I/P: 1.2 A max., 100 – 240 V~, 50 – 60 Hz, Class I
DC-output and additional information see page 2.
Trade mark: ADAPTER TECH.

Test Report Nr.: **282518 vom / dated 2015-03-31**
Test Report No.:

Das Produkt entspricht den Anforderungen hinsichtlich der Gewährleistung von Sicherheit und Gesundheit (§21 Abs.1 ProdSG). Dem Zertifikat liegen die Geschäftsbedingungen und die Prüf- und Zertifizierungsordnung der Prüfstelle zugrunde. Das Produkt entspricht den oben genannten Anforderungen, die Herstellung wird überwacht (§21 Abs.5 ProdSG).
Der Hersteller hält die Voraussetzungen ein, die für eine vorschriftsmäßige Fertigung erforderlich sind und duldet die damit verbundenen Kontrollmaßnahmen zur Überwachung der Fertigung (§22 Abs. 1 ProdSG).
Bei Nichteinhaltung der Vorschriften kann die Zeichengenehmigung zurückgezogen werden (§21 Abs. 5 ProdSG).

The product complies to the requirements in regards of safety and health (§21 Ch 1 ProdSG).

This certificate is issued based on the regulations of the certification body.

In accordance to the rules of GS certification, production surveillance is performed (§21, Ch. 5 ProdSG). The manufacturer must meet the requirements for production, and accept any control measures related to production surveillance (§22, Ch. 1 ProdSG).

In case of any irregularities or non-compliances, this certificate can be withdrawn with immediate effect (§21, Ch. 5 ProdSG).

Ausstellungsdatum: **02.04.2015**
Date of Issue

S. Kußmaul

signature

Sabine Kußmaul
Zertifizierungsstelle
Certification Department



Nemko GmbH & Co. KG
P.O. Box 1250
D-76318 Pfinztal, Germany

Office address
Reetzstr. 58
D-76327 Pfinztal, Germany

Telephone
+49 (0) 7240 63 0
www.nemko.com

Fax
+49 (0) 7240 63 11
www.nemko.de



ZERTIFIKAT CERTIFICATE



GS-1503-282518-000

Seite / Page 2 / 2

ATS050T-Pxxx:

Die „xxx“ in der Modellbezeichnung stehen für „090“, „091“, „120“, „121“, „135“, „150“, „180“, „190“, „240“ oder „480“ und beschreiben die Ausgangsleistung. Siehe Tabelle.

The „xxx“ in the model name can be „090“, „091“, „120“, „121“, „135“, „150“, „180“, „190“, „240“ or „480“ to denote output rating. See table.

Modellliste / Model list:

Modellbezeichnung / Model name	DC Ausgangsleistung / DC output rating	Transformer (T1)
ATS050T-P090	9 V, 4.0 A, 36 W	R53S10-4190
ATS050T-P091	9 V, 5.0 A, 45 W	
ATS050T-P120	12 V, 3.3 A, 39.6 W	
ATS050T-P121	12 V, 4.2 A, 50 W	
ATS050T-P135	13.5 V, 3.71 A, 50 W	
ATS050T-P150	15 V, 3.34 A, 50 W	R53S10-4210
ATS050T-P180	18 V, 2.7 A, 50 W	
ATS050T-P190	19 V, 2.64 A, 50 W	
ATS050T-P240	24 V, 2.10 A, 50 W	R53S10-4220
ATS050T-P480	48 V, 1.05 A, 50 W	R53S10-4230



Ref. Certif. No.

SG PSB-BT-00681

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT
(IECEE) CB SCHEME

CB TEST CERTIFICATE

Product	Batteries (Rechargeable Li-ion Battery)
Name and address of the applicant	NINGBO EXPOCELL TECH CO., LTD. No. 14 Hualou Street 315000 Ningbo, Zhejiang Province, PEOPLE'S REPUBLIC OF CHINA
Name and address of the manufacturer	NINGBO EXPOCELL TECH CO., LTD. No. 14 Hualou Street, 315000 Ningbo, Zhejiang Province, PEOPLE'S REPUBLIC OF CHINA
Name and address of the factory	NINGBO EXPOCELL TECH CO., LTD. No. 14 Hualou Street, 315000 Ningbo, Zhejiang Province, PEOPLE'S REPUBLIC OF CHINA
Ratings and principal characteristics	Nominal voltage: 14.6Vd.c. Rated capacity: 4300mAh
Model/type Ref.	LIP-4S2Px18650-22PTMol39
Additional information (if necessary)	
A sample of the product was tested and found to be in conformity with	IEC 62133:2012
as shown in the Test Report Ref. No. which forms part of this certificate	TÜV SÜD PSB Pte Ltd 085-28218022-000

This CB Test Certificate is issued by the National Certification Body




Date, 2018-03-22
CBS 18 03 03739 001


(Kenneth Lau)


TÜV SÜD PSB Pte Ltd · 1 Science Park Drive · Singapore 118221



PSB Singapore

		Test Report issued under the responsibility of: NCB TÜV SÜD PSB Pte Ltd 1 Science Park Drive, Singapore 118221	
<p style="text-align: center;">TEST REPORT IEC 62133</p> <p>Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications</p>			
<p>Report Number : 085-28218022-000</p> <p>Date of issue : 2018-03-21</p> <p>Total number of pages : 26 pages</p>			
<p>Applicant's name : NINGBO EXPOCELL TECH CO., LTD.</p> <p>Address : No. 14 Hualou Street, 315000 Ningbo, Zhejiang Province, PEOPLE'S REPUBLIC OF CHINA</p>			
<p>Test specification:</p> <p>Standard : IEC 62133:2012 (Second Edition)</p> <p>Test procedure : CB Scheme</p> <p>Non-standard test method : N/A</p>			
<p>Test Report Form No. : IEC62133B</p> <p>Test Report Form(s) Originator : UL(Demko)</p> <p>Master TRF : Dated 2013-03</p>			
<p>Copyright © 2013 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.</p> <p>This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.</p> <p>If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.</p> <p>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</p>			
<p>Test item description : Rechargeable Li-ion Battery</p> <p>Trade Mark : N/A</p> <p>Manufacturer : Same as the Applicant.</p> <p>Model/Type reference : LIP-4S2Px18650-22PTMol39</p> <p>Ratings : 14.6Vd.c., 4300mAh</p>			



Testing procedure and testing location:		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Testing location/ address.....:		No.11, Jukeng Rd., Juling Village, Jutang District, Guanlan, Longhua New District, 518110 Shenzhen, CHINA
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address.....:		
Tested by (name + signature).....:		Kyle Huang
Approved by (name + signature)		Ryan Jin
		
<input type="checkbox"/>	Testing procedure: TMP	
Testing location/ address.....:		
Tested by (name + signature).....:		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: WMT	
Testing location/ address.....:		
Tested by (name + signature).....:		
Witnessed by (name + signature).....:		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: SMT	
Testing location/ address.....:		
Tested by (name + signature).....:		
Approved by (name + signature)		
Supervised by (name + signature)		

**List of Attachments (including a total number of pages in each attachment):****Attachment No.1: 7 pages of Photo Documentation****Summary of testing:****Tests performed (name of test and test clause):**

Tests are made with the number of samples specified in Table 2 of IEC 62133:2012 (Second Edition).

Cl. 8.3.2 External short circuit (battery)

Cl. 8.3.3 Free fall

Cl. 8.3.6 Over-charging of battery

The samples comply with the requirement of IEC 62133: 2012 (Second Edition).

Testing location:

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Address: No.11, Jukeng Rd., Juling Village, Jutang District, Guanlan, Longhua New District, 518110 Shenzhen, CHINA

Summary of compliance with National Differences

Remark: EN Group differences are considered. National differences are not considered.

List of countries addressed: N/A**Copy of marking plate**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

Rechargeable Li-ion Battery

Model LIP-4S2Px18650-22PTMol39 (4ICR19/66-2)

14.6Vd.c., 4300mAh, 62.78Wh

CAUTION

- Do not disassemble or modify
- Do not short-circuit
- Do not dispose in fire
- Do not expose to high temperature

Production Date: YYYYMMDD

Manufacturer: NINGBO EXPOCELL TECH CO., LTD.

Date code: "YYYYMMDD" represents the date of manufacturing.

YYYY=2017, 2018, 2019...is for the year.

MM=01, 02, 03...12 is for the month. "01" represents "January", "02" represents "February", "03" represents "March" ..., "12" represents "December".

DD=01, 02...31 is for the date. "01" is the first day in month, "02" is the second day in month, ... "31" is the 31st day.



Test item particulars.....:	
Classification of installation and use.....:	Build-in and used in portable applications
Supply connection.....:	Supply by connector
Recommend charging method declared by the manufacturer	Charge at constant current 880mA until the voltage reaches 16.80V, then charge at 16.80V till charge current is 100mA.
Discharge current (0,2 I_L A)	860mA
Specified final voltage	11.00V
Chemistry	<input type="checkbox"/> nickel systems <input checked="" type="checkbox"/> lithium systems
Recommend of charging limit for lithium system	
Upper limit charging voltage per cell.....:	4.25V
Maximum charging current	4300mA
Charging temperature upper limit.....:	45°C
Charging temperature lower limit.....:	0°C
Polymer cell electrolyte type	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer
Possible test case verdicts:	
- test case does not apply to the test object.....: N/A	
- test object does meet the requirement.....: P (Pass)	
- test object does not meet the requirement.....: F (Fail)	
Testing.....:	
Date of receipt of test item	2018-01-24
Date (s) of performance of tests	2018-01-29 to 2018-03-15
General remarks:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
The samples also comply with the requirement of EN 62133:2013. There is no difference between IEC 62133:2012 and EN 62133:2013.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 62133:2013:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	
<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable	
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : Same as the Applicant.	

**General product information:**

The Rechargeable Li-ion Battery is used for portable appliance and consists of 8 cells (2P-4S), 2 cells connected in parallel and then, 4 of the parallel strings connected in series, cell model: ICR18650MF1. The cell is approved by UL (Demko).

Additionally, detail information of the battery is as following:

Product name	Rechargeable Li-ion Battery
Type/model	LIP-4S2Px18650-22PTMol39
Nominal voltage	14.6Vd.c.
Rated capacity	4300mAh
Charging voltage declared by manufacturer	16.80V
Upper limit charging voltage	17.00V
Final voltage	11.00V
Charging current declared by manufacturer	880mA
Maximum charging current	4300mA
Charging temp. upper limit	45°C
Charging temp. lower limit	0°C
First charging procedure (20°C ± 5°C)	Charge at constant current 880mA until the voltage reaches 16.80V, then charge at 16.80V till charge current is 100mA.
Second charging procedure	Stored at -5°C or 45°C for 1 h - 4 h. Charge at constant current 4300mA until the voltage reaches 17.00V, then charge at 17.00V till charge current is 0.051A (215mA).
Dimensions	Max. 37mm(T) × max. 74mm(W) × max. 70mm(L)
Weight	Approx. 364g

The final evaluation of the battery must be conducted in the end product for which the battery will be used.